

MILAN S.r.l. a socio unico


Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet

tasker® C278 – 8x2x0,08 mm²

Extra Flex Multipair Audio Cable

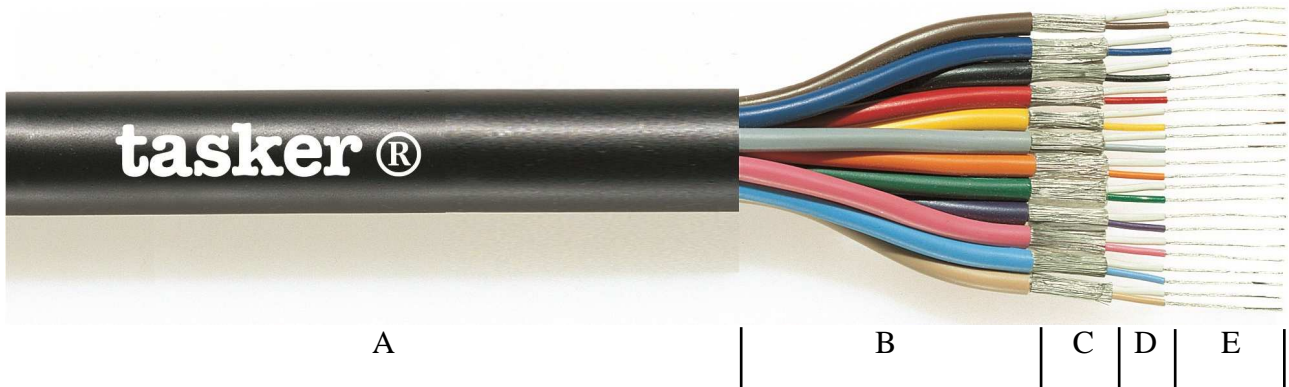

NOTE
CATEGORY
APPLICATIONS

The picture don't represent the real number of conductors.
 Multipair Audio Cable (See Audio Catalogue)
 Audio Mixers, Benches and Audio Balanced multi sockets.

- A:** Black Soft **PVC** Sheath. Outer cable Ø: 12,20 (±0,10) mm.
- B:** The single pair are isolated with **PVC**. Nom. Diam. Ø 2,90 (±0,10) mm.
Color Code: Brown, Blue, Black, Red, Yellow, Grey, Orange, Green.
- C:** The single pair are shielded with O.F.C. tinned copper spiral, covering 100%
- D:** The single cores are insulated with **PVC**.
Nom. Diam. Ø 0,90 (±0,10) mm.
Color Code: White-Brown, White-Blue, White-Black, White-Red, White-Yellow, White-Grey, White-Orange, White-Green.
- E:** O.F.C. tinned copper formation 12x0,10 mm
Nom. Cross section 8x2x0,08 mm².

MARKING
CUSTOM
PRODUCTION

tasker® C278 8x2x0,08 – 16 AWG O.F.C. MULTIPAIR AUDIO CABLE
 This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**, with or without Metallic Armor.

Cable Properties

Conductor Resistance	203 Ω/Km
Capacity Core/Core	170 pF/mt
Capacity Core/Shield	200 pF/mt
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio
Impiego		Outdoor Limited	Esterno Limitato
		Outdoor	Esterno
		Outdoor Direct Burial	Esterno Interrato

INSTALLATION	X	Fixed	Fissa
Posa	X	Restricted Mobile	Mobile Limitata
		Mobile	Mobile
		Mobile in Drag Chain	Mobile in Catena

INFORMATION	X	RoHS2 Compliant
Informazioni	X	Ver. A / 16.05.17