

# CM-398

## CV/SV to PC Converter Box

*Operation Manual*



## • **Disclaimers**

The information in this manual has been carefully checked and is believed to be accurate. Cypress Technology assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

Cypress Technology assumes no responsibility for any inaccuracies that may be contained in this document. Cypress also makes no commitment to update or to keep current the information contained in this document.

Cypress Technology reserves the right to make improvements to this document and/or product at any time and without notice.

## • **Copyright Notice**

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means - electronic, mechanical, magnetic, optical, chemical, manual, or otherwise - without express written permission and consent from Cypress Technology.

© Copyright 2009 by Cypress Technology.

All Rights Reserved.

Version 1.0 January 2010

## • **Trademark Acknowledgments**

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.

## • **Safety Precautions**

Please read all instructions before attempting to unpack or install or operate this equipment, and before connecting the power supply. Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through module openings or empty slots, as you may damage parts.
- Do not attach the power supply cabling to building surfaces.
- Do not allow anything to rest on the power cabling or allow it to be abused by persons walking on it.
- To protect the equipment from overheating, do not block the slots and openings in the module housing that provide ventilation.

## • **Revision History**

<u>Version No</u>	<u>Date</u>	<u>Summary of Change</u>
<b>V1</b>	<b>20100224</b>	<b>Preliminary Release</b>

# ***Table of Contents***

<b>1. Introduction.....</b>	<b>1</b>
<b>2. Applications.....</b>	<b>1</b>
<b>3. Package Contents.....</b>	<b>1</b>
<b>4. System Requirements.....</b>	<b>1</b>
<b>5. Features.....</b>	<b>1</b>
<b>6. Specifications.....</b>	<b>2</b>
<b>7. Operation Controls and Functions.....</b>	<b>3</b>
7.1 Front Panel .....	3
7.2 Rear Panel .....	3
7.3 Top Panel .....	4
<b>8. Connection and Installation.....</b>	<b>5</b>
<b>9. Acronyms .....</b>	<b>6</b>

## **1. Introduction**

This is a low cost video to PC converter box that can convert CV/SV (NTSC or PAL system) to XGA, SXGA and UXGA resolutions. It also allows you to view DVD, VCR or video game sources on your PC display.

## **2. Applications**

- Digital camcorders and personal PDAs
- PCI/USB based video capture and TV tuner cards
- Personal media players and recorders
- Smartphones & multimedia handsets

## **3. Package Contents**

- CV/SV to PC converter Box
- DC Adaptor
- Operation Manual

## **4. System Requirements**

Input source devices with S-Video output or with a converter cable to S-Video and output to a PC display with a D-Sub 15pin connection cable.

## **5. Features**

- Operates in NTSC 3.58 and PAL system
- Output Frame Rates: 60Hz
- High Quality Scaling Engine
- Supported output resolutions: XGA, SXGA and UXGA
- 50/60 Hz frame rate conversion ensures glitch-free display
- Play video games on your VGA monitors
- High-resolution output picture
- Plug & play- no driver software required


## 6. Specifications

Input Ports	1 x CV, 1 x SV
Output Port	1 x VGA
Output Resolution	XGA, SXGA and UXGA
Power Supply	5V/1A DC (US/EU standards, CE/FCC/UL certified)
Dimensions (mm)	100(W) x 64(D) x 18.5(H)
Weight(g)	100
Chassis Material	Plastic
Silkscreen Color	White
Operating Temperature	0°C ~ 40°C / 32°F ~ 104°F
Storage Temperature	-20°C ~ 40°C / -4°F ~ 140°F
Relative Humidity	20~60% RH (non-condensing)
Power Consumption	2.5 W

## 7. Operation Controls and Functions


The following sections describe the hardware components of the unit.

### 7.1 Front Panel

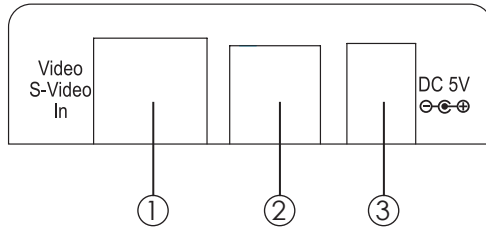


- ① S-Video input: This slot is where you connect the input source, such as a digital camcorder or a PDA with an S-Video cable in order to send an input signal.
- ② Composite (CV) input: This slot is where you connect the input source such as a personal media player or personal recorder with a CV cable in order to send an input signal.
- ③ DC 5V In: This slot is where you plug the 5V DC power supply into the unit and connect the adaptor to an AC outlet.

### 7.2 Rear Panel

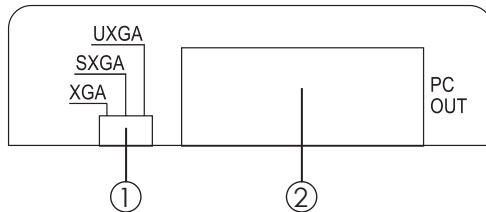

- ① XGA/SXGA/UXGA switch: This dip switch allows you to set the output timing to XGA, SXGA or UXGA. Simply push the dip switch to left, middle or right and the output image will display your desired timing.
- ② PC OUT: This slot is where you connect the output display with a D-Sub 15pin cable for image display.


### 7.3 Top Panel

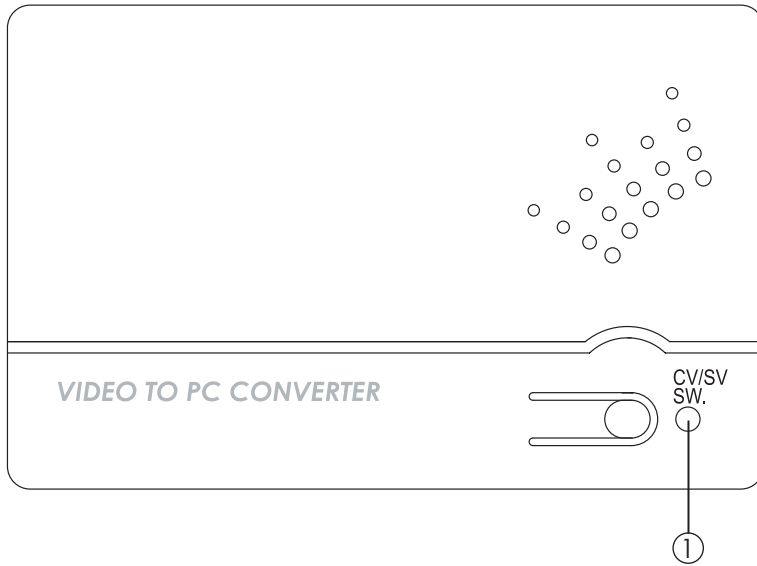

- ① CV/SV SW & LED: Press this button to switch the input source between composite or S-Video. The LED will turn yellow when switched to composite input and will switch to red when changed to S-Video input.



## 8. Connection and installation

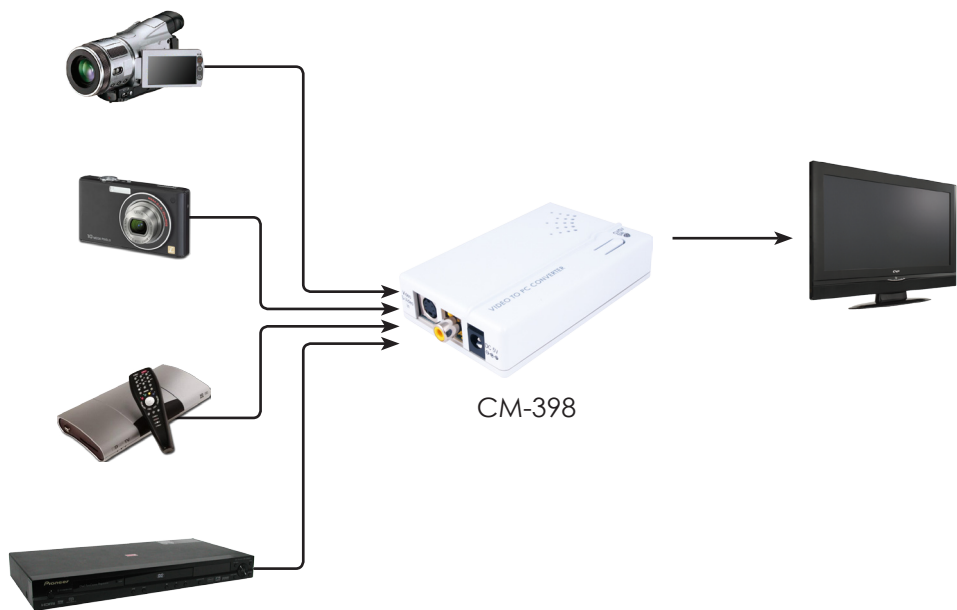



# Acronyms

---

## **Acronym**

## **Complete Term**

NTSC	National Television System Committee
PAL	Super Extended Graphics Array
SXGA	Phase Alternate Line
UXGA	Ultra Extended Graphics Array
XGA	Extended Graphics Array





**CYPRESS TECHNOLOGY CO., LTD.**  
Home page: <http://www.cypress.com.tw>

20100302 MPM-CM398