

MILAN S.r.l. a socio unico

Head Office – Export department:  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it


## Technical Datasheet

**tasker® TSK1067 – 7x(0.60/2.80/4.50)**

**Firestop®**

**Special Multi Coax Video cable 75 Ω**

RoHS<sub>2</sub>  
 2002/95/EC  
 2011/65/UE

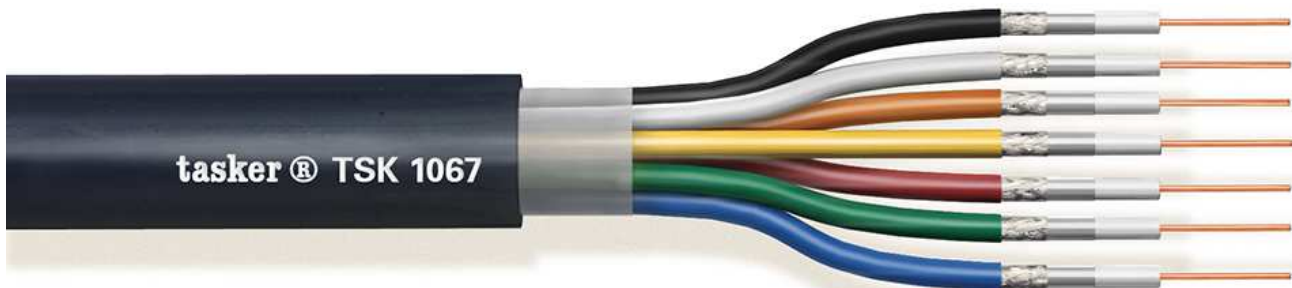

|   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|
| A | B | C | D | E | F | G |
|---|---|---|---|---|---|---|

**CATEGORY** Multi Coaxial cable 75 Ω (See Video Catalogue)

**APPLICATIONS** Broadcast and video mixers.

- A:** Blue Night **Flame Retardant PVC** Sheath.  
Outer diam. Ø 14,70 (±0,20) mm.
- B:** Total taping in unweaved polyester.
- C:** Soft PVC Sheath on single conductors.  
Color Code: Red, Green, Blue, Black, White, Yellow, Grey.  
Diam. Ø 4,50 (±0,20) mm.
- D:** First Shielding in O.F.C. tinned copper braid covering 90%.
- E:** Second Shielding in aluminum foil tape covering 100%.
- F:** Core Insulation in FOAM PE. Diam. Ø 2,80 (±0,20) mm.
- G:** Stiff wire formation in O.F.C. red copper, 1x0,61 mm.  
Nom. Cross section 7x0,29 mm<sup>2</sup> (75Ω).

**MARKING**  
**CUSTOM**  
**PRODUCTION**

**tasker® TSK1067 - 7x75 ohm - MultiChannel Digital Video Cable - Made in Italy**  
 This product may be custom produced also in **LSZH, PE, PUR,**  
 with or without Metallic Armor.

MILAN S.r.l. a socio unico

**Head Office – Export department:** **Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa, 74 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158 T. +39 02 9039.0037-0059  
 F. +39 02 9039.4551 F. +39 02 9039.0049  
 www.taskercables.com www.tasker.it

**Cable Properties**

|                                |           |
|--------------------------------|-----------|
| <b>Conductor Resistance</b>    | 61 Ω/Km   |
| <b>Capacity Core/Shield</b>    | 56 pF/m   |
| <b>Velocity of Propagation</b> | 78%       |
| <b>Impedance</b>               | 75 Ω      |
| <b>Max Rated Voltage</b>       | 49 V      |
| <b>Operative Temperature</b>   | -20/+70°C |

**Attenuation dB/100 m.**

|                 |      |
|-----------------|------|
| <b>30 MHz</b>   | 6,2  |
| <b>100 MHz</b>  | 11,3 |
| <b>200 MHz</b>  | 15,0 |
| <b>300 MHz</b>  | 18,2 |
| <b>500 MHz</b>  | 24,0 |
| <b>1000 MHz</b> | 36,0 |

|                |          |                       |                   |                     |          |                      |                  |                     |          |                   |
|----------------|----------|-----------------------|-------------------|---------------------|----------|----------------------|------------------|---------------------|----------|-------------------|
| <b>USE</b>     | <b>X</b> | Indoor                | Interno Edificio  | <b>INSTALLATION</b> | <b>X</b> | Fixed                | Fissa            | <b>INFORMATION</b>  | <b>X</b> | RoHS2 Compliant   |
| <b>Impiego</b> |          | Outdoor Limited       | Esterno Limitato  | <b>Posa</b>         | <b>X</b> | Restricted Mobile    | Mobile Limitata  | <b>Informazioni</b> | <b>X</b> | Ver. A / 16.05.17 |
|                |          | Outdoor               | Esterno           |                     |          | Mobile               | Mobile           |                     |          |                   |
|                |          | Outdoor Direct Burial | Esterno Interrato |                     |          | Mobile in Drag Chain | Mobile in Catena |                     |          |                   |