


MILAN S.r.l. a socio unico

Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet

FirestoP® tasker® TR 11 - Triaxial Broadcast Cable 75 Ω

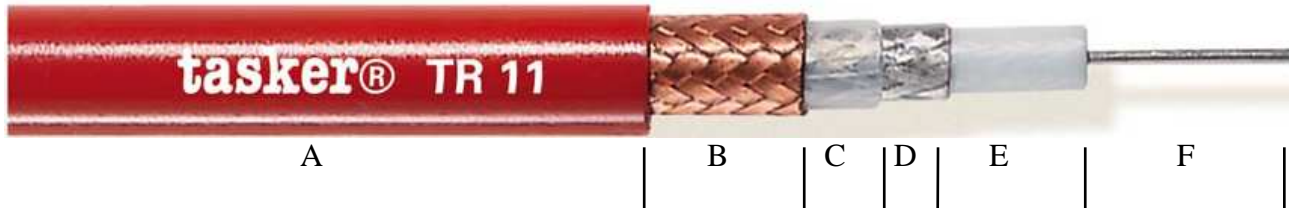

CATEGORY Triaxial cables 75 Ω (See Video Catalogue)
APPLICATIONS Professional Video Installation and Broadcast

- A:** Soft red **PVC** Low smoke and Flame Retardant Sheath.
Outer cable Diam. Ø: 11,00 (±0,20) mm.
- B:** First Shielding in O.F.C. red copper Braid covering 92% over a not woven polyester tape.
- C:** Intermediate sheath in compact PE – Diam. Ø 8,50 (±0,20) mm.
- D:** Second Shielding in **Silver Plated copper** Braid covering 92%.
- E:** Core Insulation with Expanse Polyethylene (PE) – Diam. Ø 6,40 (±0,20) mm.
- F:** Stiff wire in **Silver Plated copper**, Formation 1x1,40 mm.
Nom. Cross section 1x1,54 mm².

MARKING tasker® TR11 – 75 OHM – BROADCASTING TRIAXIAL CABLE
CUSTOM This product is also available in **PVC, PE, PUR**, with or without **Steel Armor**.

Cable Properties

Conductor Resistance	11,50 Ω/Km
Capacity Core/Shield	56 pF/m
Velocity of Propagation	80%
Impedance	75 Ω
Max Rated Voltage	2.000 V
Operative Temperature	-20/+70°C

Attenuation db/100 m

50 MHz	3,7	1000 MHz	20,6
100 MHz	5,4	1500 MHz	26,6
300 MHz	10,5	2000 MHz	32,0
600 MHz	15,6	3000 MHz	40,5

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS3 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. B / 16.05.19
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			