



Operation Manual

Led Strobe can make colorful and dynamic light scenery effects. It is widely applied to entertainment hall, club and stage

A Specification

1. Weight: 4.9kg
2. Size: 46*20*12.5cm
3. Power input: AC 120V/240V, 60Hz/50Hz
4. Wattage: 34W
5. LEDs: 336PCS RGB (108 RED, 108 GREEN, 120 BLUE)
6. 3PIN female XLR socket and 3PIN male XLR socket
7. Built-in microphone

B. Function description

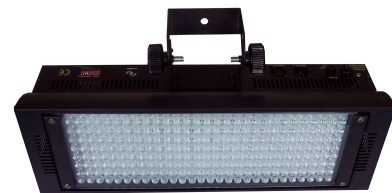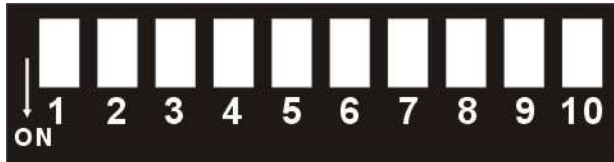

| Mode | Dip10 dip9 | Dip8 dip7 dip6 dip5 dip4 dip3 dip2 dip1 | Function |
|------------------------------------|------------|---|---|
| Auto Run (Master projector) | 0 0 | X X 0 0 0 0 0 0 | Color changing and color fading Select running speed via dip7, dip8 |
| | | 0 0 X X X X X X | Static color and flash Select static color via dip1~dip3 (separately for R.G.B) select flash speed via Dip4~dip6 |
| Sound activated (Master projector) | 0 1 | X X X X X X X X | Change color via sound activated |
| DMX | 1 X | X X X X X X X X | DMX mode CH1→R CH2→G CH3→B CH4→Dimmer and flash |
| Other | 1 0 | 0 0 0 0 0 0 0 1 | 1. DMX address is 1 when in DMX mode 2. As Slave projector when in M/S mode |
| | 1 0 | 0 0 0 0 0 0 0 0 | Black out |

DMX Value/Function

| CHANNEL | VALUE | FUNCTION |
|---------|---------|-------------|
| CH1 | 000-255 | RED |
| CH2 | 000-255 | GREEN |
| CH3 | 000-255 | BLUE |
| CH4 | 000-189 | DIMMER |
| | 190-250 | FLASH |
| | 251-255 | NO FUNCTION |