

# 1x1 HDMI 1.3 Repeater

**Operation Manual**



## **TABLE OF CONTENTS**

<b>1. Introduction</b> .....	1
<b>2. Features</b> .....	1
<b>3. Operation Controls and Functions</b> .....	2
3.1 Front Panel.....	2
3.2 Rear Panel.....	2
<b>4. Connection and Installation</b> .....	3
<b>5. Specifications</b> .....	3
<b>6. Cypress HDMI v1.3 Series</b> .....	6

## **1. Introduction**


The HDMI v1.3 Distribution Amplifier Series is the most advanced solution to HDMI signal distribution. Each product in this series is compatible to HDMI v1.3 specifications, a cutting edge technology which defines the support to transfer Deep Color (10-bit and 12-bit ) video and new lossless compressed (Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio) digital audio, with a high bandwidth up to 225MHz (6.75Gbps). Besides splitting and distributing, the HDMI v1.3 DA series also does signal amplification and equalization, so as to provide high performance I/O of audio and video. Each of the buffered output can run up to 30 meters and can be cascaded.

## **2. Features**

- HDMI 1.3, HDCP1.1 and DVI1.0 compliant Receiver.
- Deep color video up to 12bit, 1080p@60Hz.
- One HDMI source to connect to one HDMI display simultaneously.
- HDCP keysets allows each output to work independently when connecting to a HDMI display.
- Split a HDMI source to one output without signal loss.
- Supports DVI source and DVI display by using HDMI to/from DVI adaptor cable.
- Supports LPCM 7.1CH, Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio transmission (32-192kHz Fs sample rate).
- Supports a wide range of PC and HDTV resolutions from VGA to UXGA and 480i to 1080p.
- HDMI cable distance test with 1080p resolution: Input/Output source can run up to 30M/5.1CH.
- Full HDCP Compliant.


### 3. Operation Controls and Functions

#### 3.1 Front Panel

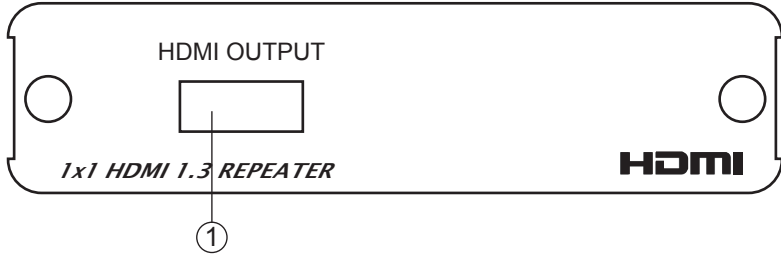


- ① HDMI Output: Connect output port to the HDMI display.

#### 3.2 Rear Panel

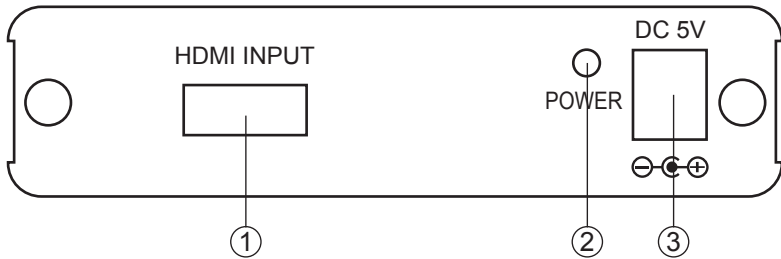

- ① HDMI Input: Connect input port to the HDMI or DVI output of your source equipment such as DVD player or set-top-box.
- ② POWER Indicator: The power LED will illuminate when power on.
- ③ Power: Plug the 5V DC power supply into this unit and connect the adaptor to AC wall outlet.

## 4. Connection and Installation

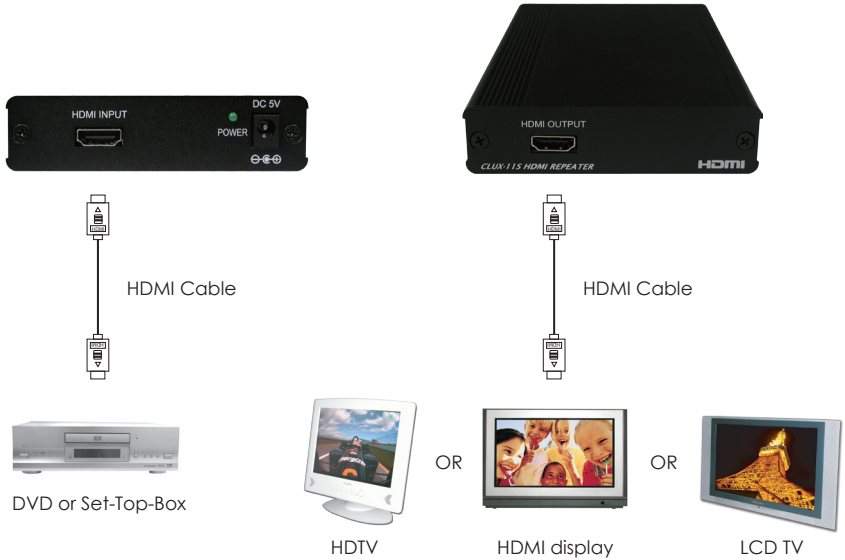

## 5. Specifications

Frequency bandwidth	2.25Gbps (single link)
Input port	1 x HDMI female port (Type A connector)
Output port	1 x HDMI female port
Power Supply	5VDC/2.6A (US/EU standards, CE/FCC/UL certified)
Dimensions (mm)	100(W) x 147(D) x 25(H)
Weight(g)	300
Chassis Material	Aluminum
Silk Skin Color	Black
Operating Temperature	Operating from 0°C ~ 40°C





## 6. Cypress HDMI v1.3 Series:

Product	Description
CLUX-11S	1x1 HDMI V1.3 Repeater
CLUX-12S	1x2 HDMI V1.3 Splitter
CLUX-14S	1x4 HDMI V1.3 Splitter
CLUX-18S	1x8 HDMI V1.3 Splitter
CLUX-21SY	2x1 HDMI V1.3 Switcher
CLUX-31S	3x1 HDMI V1.3 Switcher
CLUX-31SY	3x1 HDMI V1.3 Switcher
CLUX-41SY	4x1 HDMI V1.3 Switcher
CLUX-41AT	4x1 HDMI V1.3 Switcher with Digital Audio
CLUX-42S	4x2 HDMI V1.3 Switcher
CLUX-110S	1x10 HDMI V1.3 Splitter
CLUX-210S	2x10 HDMI V1.3 Splitter
CLUX-210T	2x10 HDMI V1.3 Splitter with Digital Audio



**CYPRESS TECHNOLOGY CO., LTD.**  
Home page: <http://www.cypress.com.tw>