

MILAN S.r.l. a socio unico


Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet

tasker® C274 – 4x2x0,08 mm²

Extra Flex Multipair Audio Cable

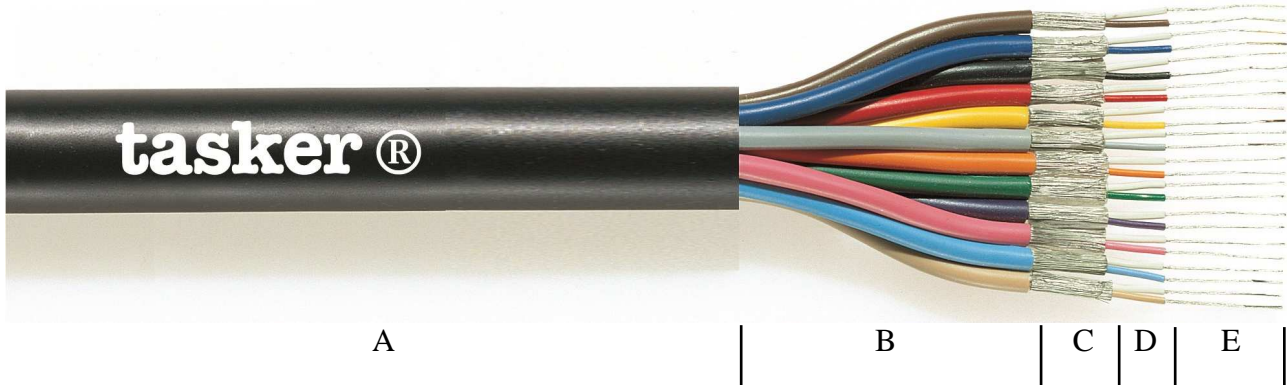

NOTE
CATEGORY
APPLICATIONS

The picture don't represent the real number of conductors.
 Multipair Audio Cable (See Audio Catalogue)
 Audio Mixers, Benches and Audio Balanced multi sockets.

- A:** Black Soft **PVC** Sheath. Outer cable Ø: 9,20 (±0,10) mm.
- B:** The single pair are isolated with **PVC**. Nom. Diam. Ø 2,90 (±0,10) mm.
Color Code: Brown, Blue, Black, Red.
- C:** The single pair are shielded with O.F.C. tinned copper spiral, covering 100%
- D:** The single cores are insulated with **PVC**.
Nom. Diam. Ø 0,90 (±0,10) mm.
Color Code: White-Brown, White-Blue, White-Black, White-Red
- E:** O.F.C. tinned copper formation 12x0,10 mm
Nom. Cross section 4x2x0,08 mm².

MARKING
CUSTOM
PRODUCTION

tasker® C274 4x2x0,08 – 16 AWG O.F.C. MULTIPAIR AUDIO CABLE
 This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**, with or without Metallic Armor.

Cable Properties

| | |
|------------------------------|-----------|
| Conductor Resistance | 203 Ω/Km |
| Capacity Core/Core | 170 pF/mt |
| Capacity Core/Shield | 200 pF/mt |
| Max Rated Voltage | 49 V |
| Operative Temperature | -15/+70°C |

| | | | |
|----------------|----------|-----------------------|-------------------|
| USE | X | Indoor | Interno Edificio |
| Impiego | | Outdoor Limited | Esterno Limitato |
| | | Outdoor | Esterno |
| | | Outdoor Direct Burial | Esterno Interrato |

| | | | |
|---------------------|----------|----------------------|------------------|
| INSTALLATION | X | Fixed | Fissa |
| Posa | X | Restricted Mobile | Mobile Limitata |
| | | Mobile | Mobile |
| | | Mobile in Drag Chain | Mobile in Catena |

| | | |
|---------------------|----------|-------------------|
| INFORMATION | X | RoHS2 Compliant |
| Informazioni | X | Ver. A / 16.05.17 |
| | | |
| | | |